



IDAutomation SC5USB-D: Enable TAB as Prefix (Tab before Barcode)



1. Scan the Program Barcode

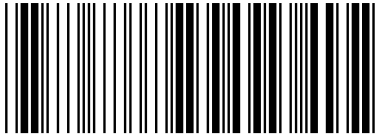


2. Scan the Prefix Barcode



3. To enable the TAB scan 0, 9 (or to disable TAB scan 0,0)



4. Scan Finish Barcode



5. Scan the Exit Barcode

